



ELECTRICAL CONNECTION

Please disconnect the vehicle battery before installing or servicing your LED light installation. If in doubt, it is recommended to use the services of a professional installer. It is recommended to use the available corresponding Triple-R wiring kit for your product. If utilizing existing (non Triple-R) wiring, make sure to use the appropriate wire gauge and fusing in line with your lights.

GLIDE WITHOUT BACKLIGHT

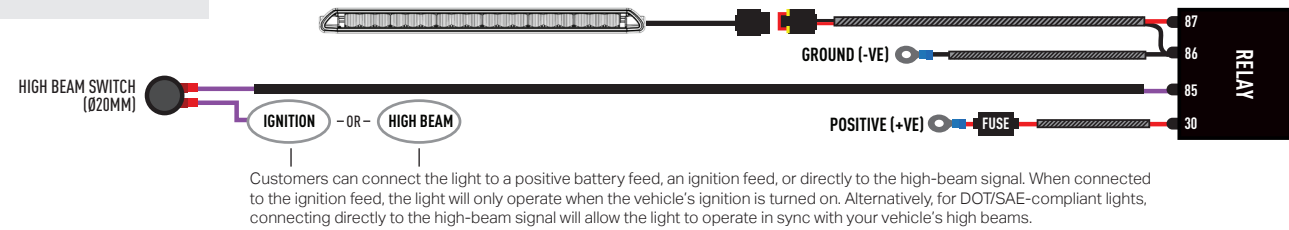

LINEAR-18 ELITE / GLIDE WITH BACKLIGHT

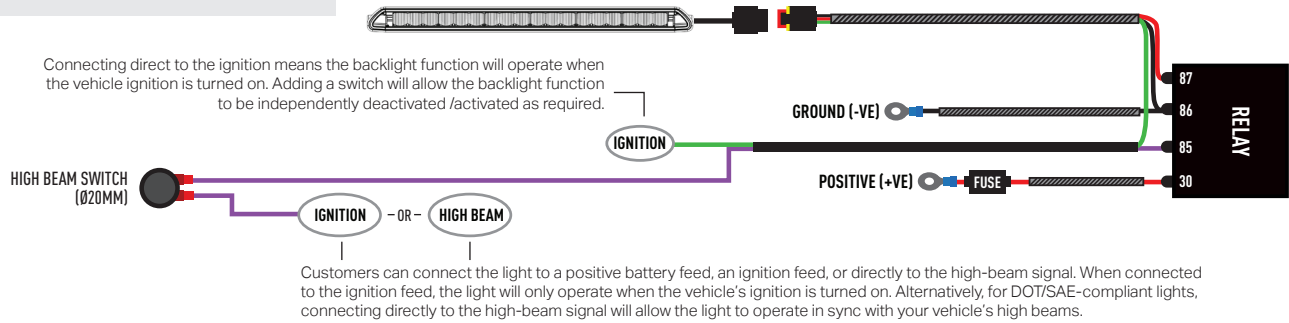

LINEAR-18 ELITE+ / LINEAR-18 ELITE I-LBA

Please refer to the instructions that are included with the lamp.



Please visit the lamps' product page on our website at www.triple-r-lights.com to view the DOT / SAE compliance test reports.

TRIPLE-R
HIGH PERFORMANCE LIGHTING

A LAZER LAMPS COMPANY

CHEVROLET TAHOE (2021-2022)
/ SUBURBAN (2021-2024)
GRILLE KIT

FITTING INSTRUCTIONS



TRIPLE-R
HIGH PERFORMANCE LIGHTING

WWW.TRIPLE-R-LIGHTS.COM

We appreciate your purchase of a Triple-R Lights' product, and value your feedback. If you would like to leave feedback on your Triple-R experience, please head to the relevant product page on our website www.triple-r-lights.com.

technical@triple-r-lights.com

Triple-R Lights LLC, 600 North Bullard Avenue,
Suite 6, Goodyear, AZ 85338
UNITED STATES

UK BUILT | US DRIVEN    /TRIPLERLIGHTS


WHAT'S INCLUDED

- 2x Grille Mounting Brackets
- 2x Cutting Guides
- Anti-Theft Fasteners & Key
- Fitting Instructions

Additionally - Kit Includes:


- 1x Linear-18 / Glide LED Lightbar
- 1x One-Lamp Wiring Kit

TOOLS REQUIRED

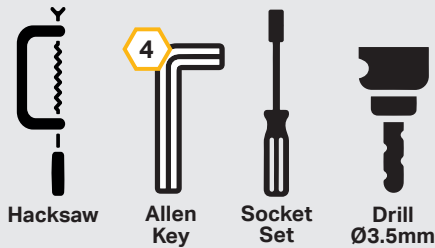

TORQUE VALUES

The code is written on the inside of each bracket (see example).

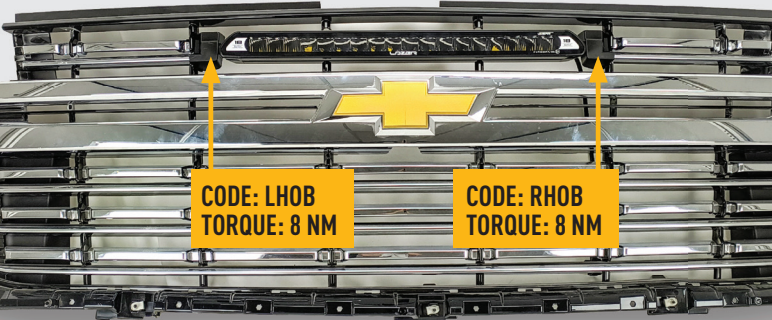

INSTALLATION PROCESS - Linear-18 shown for illustration purposes. Install should be completed with the grille left on the vehicle.

1

Place cutting guides and cut the grille using a hacksaw.

2

1/2" (13mm)

5/8" (16mm)

3

4

Torque info see adjacent.

5

Please use a thread seal compound (i.e. Loctite 222) to protect the lamp fastener from binding over time.

5

Clip the cap onto each bracket.

6

7

Ø3.5mm

8

x2